




BARTLETT Instrument Company

Get Your Alarms Set In Case of Emergencies!

[Home](#) • [Controller Overview](#) • [GHK](#) • [RWL](#) • [CIS](#) • [W/R Alarm](#)

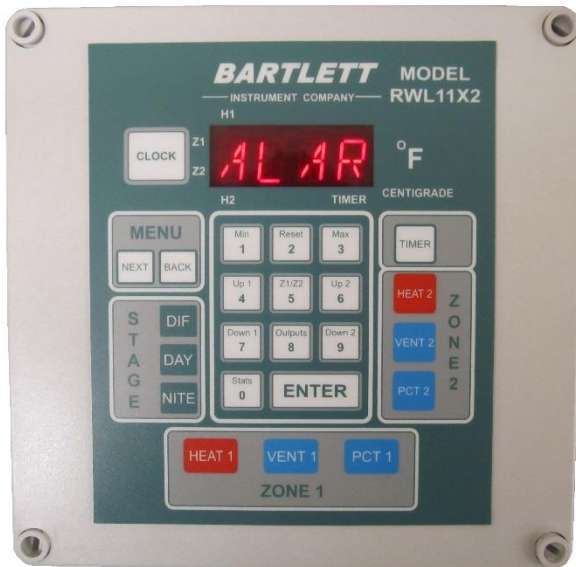

It's important to get your alarms set in your greenhouse so when the temperature gets too high or too low, you are able to remedy the situation quickly. When using the controller in 2 zone mode, users need to set the alarm conditions for each zone separately. You can use the Alarm output to trigger an auto dialer or if you are a CIS user, it will trigger a text or email alert.

The alarm can be set for as high as 131°F or as low as 32°F. We recently had a customer tell us they were certain they'd never get over 110 degrees (their alarm set point), so when they did, they were grateful to have the alarm to alert them of the problem so they could fix it as quickly as possible.

To set the alarm set points on the GHK12X2 and RWL11X2:

1. Press the Menu or Next button repeatedly until ALM1 appears
2. Press Enter
3. "Lo 1" and the current Zone 1 low alarm will flash alternately
4. Type in the desired low alarm set point for Zone 1 and press Enter
5. "Hi 1" and the current Zone 1 high alarm will flash alternately
6. Type in the desired high alarm set point for Zone 1 and press Enter
7. The controller will return to normal operation
8. To set Zone 2, press the Menu or Next button repeatedly until ALM2 appears
9. Repeat steps 2 - 6 for Zone 2. The controller will read "Lo 2" and "Hi 2" for Zone 2

Don't let your greenhouse reach undesired temperatures without you knowing.

Make sure your alarm set points are entered so you don't have to worry! Have any questions about setting your controller? Give us a call and we will be happy to help!

BARTLETT

Instrument Company

1032 Avenue H

Fort Madison, IA 52627

Phone: 1(888)404-9026 Fax: (319)372-5560

www.bartinst.com

**Get social with us to keep up with
our latest deals and tips!**

